



## K.SLL 2 SUPERIOR HEAVY HAULAGE TRANSPORTATION BY KÄSSBOHRER

Engineered to handle your cargo with care, the Kässbohrer Low-Loader, K.SLL 2, enables with a ground clearance height of 325 mm the transport of heavy goods up to 3.675 mm height appropriate to International regulations. Its bolted gooseneck shortens loading operations of bulky goods, while enhancing safety with front loading option.

Extendable up to 5.500 mm, K.SLL 2 is equipped with hydraulic axles providing maximum mobility under the toughest road conditions. With its strong chassis and robust construction, the K.SLL 2 is designed for the safe transport of heavy haulage and abnormal goods.



**Kässbohrer**



Olofssons i Syd AB


Tel: 0454-32 12 40

ASARUM

[www.oisyd.se](http://www.oisyd.se)

# SLL 2 / 2H - 18 / 20

## SPECIFICATIONS

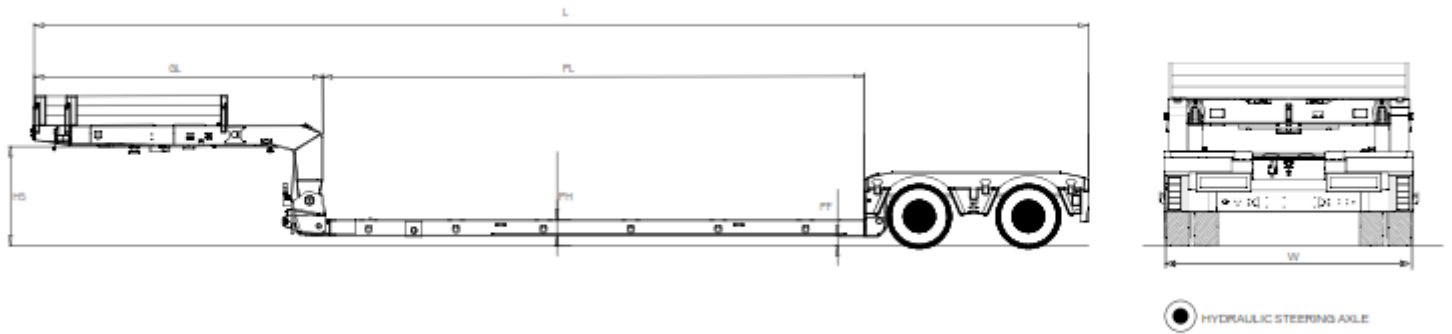

### Technical Information

<b>Chassis</b>	S700 MC high strength steel
<b>Axles and Suspension</b>	SAF axles, 12 t technical capacity, pneumatic suspension and drum brakes
<b>Brake System</b>	Wabco EBS, dual circuit electro-pneumatic brake system according to 71/320/EEC
<b>Electric System</b>	24 Volt lighting installation with 2 x 7 pin plug sockets according to 76/756/EEC
<b>Gooseneck</b>	Hydraulic adjustable and detachable 18 t capacity
<b>Pool Dimensions</b>	6,750 mm length , 5,500 mm extension, 325 mm height from top
<b>Steering System</b>	Hydraulic steering (Knuckle-steering)
<b>Control of Hydraulic Axles</b>	Wireless remote control
<b>Tyres</b>	8 + 1 units 245/70 R 17,5 tyres and steel rims
<b>Axle alignment</b>	Auto alignment system

### Technical Data

<b>H5</b>	5th Wheel Height	1.250 mm
<b>L</b>	Total Vehicle Length (closed/ extended)	13.150 mm/ 18.650 mm
<b>GL</b>	Gooseneck Length	3.600 mm
<b>PL</b>	Platform Length	6.750mm/ 12.250mm
<b>PH</b>	Pool Height	325 mm
<b>PF</b>	Ground Clearance Height (not extended)	125 mm
<b>W</b>	Total Width	2,540 mm

### Technical Capacities

Kingpin Capacity	18,000 kg
Tare Weight	12,000 kg
Total Permissible Weight (80km/h)	39,400 kg
Total Permissible Weight (60km/h)	41,200 kg
Total Permissible Weight (40km/h)	42,000 kg

## Enhanced Features

### Wide Product Range

the extendable Kässbohrer Low-Loader product family includes 2 to 4 hydraulic steering axles with hydraulic or pneumatic suspensions and width options from 2.540 mm to 2.740 mm.

### Load Security

For a safe and fast transportation, the Kässbohrer Low-Loader is equipped with a wide range of load security systems.

- Lashing rings:

- Gooseneck: 1 x 2 lashing rings with 4 t capacity
- Pool: 7 x 2 lashing rings with 4 t capacity
- rear Platform: 4 x 2 lashing rings with 4 t capacity

- aluminum gooseneck panels

- 2 x 2 units extension warning plates with 423 mm x 423 mm, extendable up to 400 mm
- rear flashing beacon light

