

GMG

Global Machinery Group, Inc.

1330-ED Micro Electric Drive

MICRO SLAB SCISSOR LIFT

- ✓ **Maximum Performance**
- ✓ **Superior Components**
- ✓ **Environmentally Better**

STANDARD FEATURES:

- Direct Electric Drive - providing whisper quiet operation and extended duty cycles
- Extremely light weight 1,609 lbs (730 kg) with low ground pressure. Perfect for elevator and mezzanine applications
- Easily fits through standard doorways
- Drives at full height
- Fully proportional drive and lift
- Amazing 30% gradeability
- Active pothole protection system
- Automatic 'Smart' battery charger for quick charging
- Multiple disc brakes for smooth stopping
- Extra long slide-out deck with 4 oversized rollers for silky smooth operation
- Folding guardrails
- AC power cable to platform
- Pull out module for easy servicing
- Nitrate coated pins provide long lasting maintenance free service
- 2 year warranty

**EXTREME GRADE
FOR HEAVY CONSTRUCTION USE**

www.goGMG.com



Effective Date: January, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using GMG equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied.

SPECIFICATIONS

MODEL	1330-ED Micro	
Measurements	US	Metric
Working height maximum	19.1'	5.8 m
A Platform height maximum	13.1'	4 m
B Platform height - stowed	33.7"	.86 m
C Platform length - retracted	48.4"	1.23 m
D Platform length - extended	70.4"	1.79 m
Slide-out platform extension deck	21.7"	.55 m
E Platform width - outside	29.3"	.74 m
Toeboard height	6.7"	0.17 m
F Height - stowed	77"	1.95 m
rails lowered	59"	1.5 m
G Length stowed	56.8"	1.44 m
w/o ladder	48.8"	1.24 m
H Width	29.9"	.76 m
I Wheelbase	39.3"	1 m
J Ground clearance - center	2.3"	5.8 cm
- pothole bars deployed	Fixed	Fixed

Productivity




Maximum platform occupancy	2	
Lifting capacity	530 lbs	240 kg
Extension deck capacity	220 lbs	100 kg
Drive height	Full Height	
Drive speed - stowed	2 mph	3.2 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed	30%	
Turning radius - inside	14"	35 cm
Raise speed	21 seconds	
Lower speed	18 seconds	
Controls	Fully Proportional	
Drive	Direct Electric	
Tires - Solid, Non-marking	9" x 3"	22.8x 7.6 cm

Power

Power source	24v, 95Ah
--------------	-----------

Weight

ANSI	1,609 lbs	730 kg
CE	1,609 lbs	730 kg

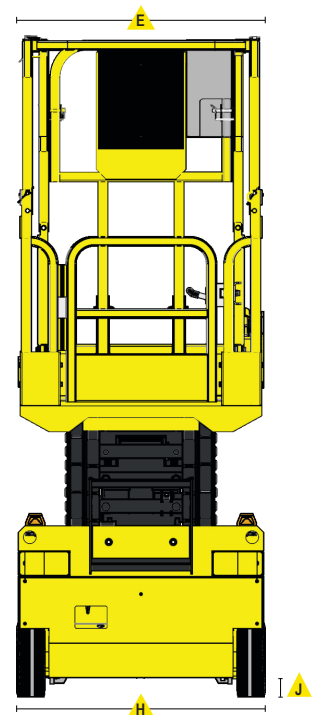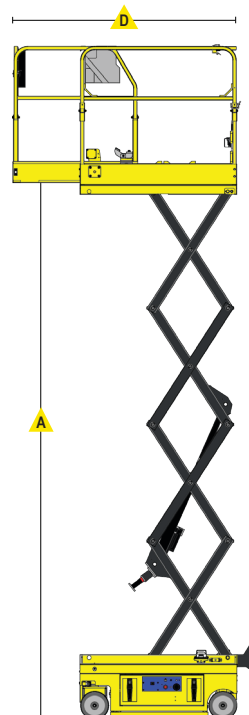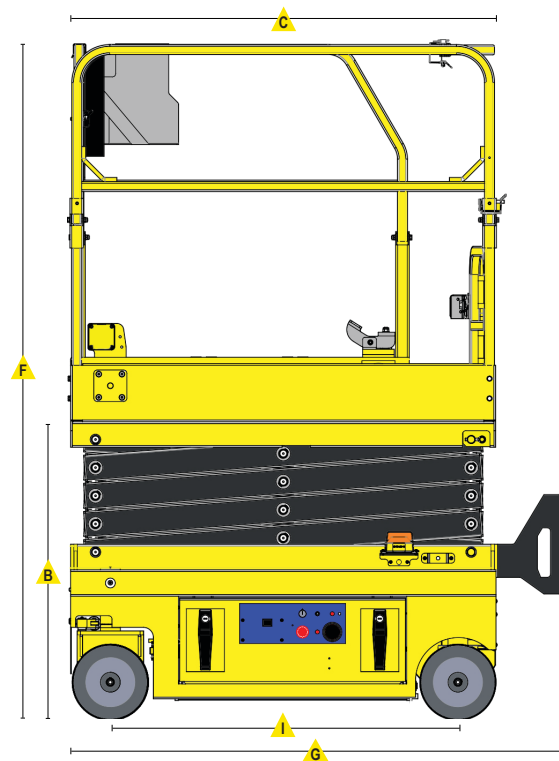

GMG Corporate Office

3428 Bullock Lane
 San Luis Obispo, CA 93401
 Phone: +1.805.303.2066
 Toll Free (USA/Canada): +1.800.301.0499

Distributed By:



www.goGMG.com