



119 kW (Stage IIIa)

129 kW (Stage IV)



40 t



30 m



MULTICAB

643E

Telescopic crawler crane

Stage IV

643E Advanced. The E-Series.



TX10 telescopic crane

What makes up the E-Series

- Over 25 years of experience in construction and building of highly specialized telescopic cranes
- Uncompromisingly high performance in all areas
- Technology that can be mastered: High-quality components without over-engineering
- Long service life and high value stability

Your top benefits:

1

Green Efficiency

Save fuel – reduce operating costs

Work quietly – protect operator and environment



2

Peak performance

Robust boom system – work on an incline of up to 4°

3

Maximum usability

MultiCab – work in comfort

SENCON – work program selection made easy



4

Flexibility in service

Operate under full load – less space required

Strong undercarriage traction – good off-road capability

5

Easy transport

Mobile undercarriage with outrigger – ready to go in no time

6

Maintenance and service made easy

SENNEBOGEN control system – easy error diagnostics

Simple maintenance – clear labeling

7

Consultation and support in your area

3 production sites – 2 subsidiaries

130 sales partners – over 350 service stations



Stage IV

- Most modern, powerful engine
- Fuel-efficient
- Clean emissions

643E Technical data, equipment

MACHINE TYPE

Model (type) **643**

ENGINE

Model	Cummins diesel engine QSB 4.5 119 kW / 162 hp at 2,200 rpm Compliant with Stage IIIa emission standards
	Cummins diesel engine QSB 4.5 129 kW / 175 hp at 2,500 rpm Compliant with Stage IV emission standards
	Direct injection, turbo-charged, charge air cooling, reduced emissions
Cooling	Water-cooled
Diesel filter	With water separator and heating system
Air filter	Dry filter with integrated pre-separator, automatic dust discharge, main element and safety element, contamination indicator
Fuel tank	360 l
DEF tank	38 l
Electr. system	24 V
Batteries	2 x 155 AH battery disconnect switch
Options	<ul style="list-style-type: none"> ■ Low temperature package with engine pre-heating and heated diesel filter for temperatures below -20 °C ■ Electric diesel fuel pump

UPPERCARRIAGE

Design	Torsion-resistant box design, precision-crafted, steel bushings for boom bearings. Extremely service-friendly design, longitudinal engine
Electrical system	Central electrical distributor, battery disconnect switch
Cooling system	3-circuit cooling system with high cooling capacity, electronically regulated fan drive for water, charge air and oil cooler
Safety	Rearview and right sideview cameras, LED lighting package
Options	<ul style="list-style-type: none"> ■ Additional LED headlights ■ Up to 2 additional cameras ■ Maritime climate varnishing as corrosion protection ■ Low temperature package for use at temperatures below -20 °C

Options

- Automatic central lubrication for boom pivot point, luffing cylinder, slewing ring track and winch drum bearing
- Pinion tooth lubrication for slewing ring



HYDRAULIC SYSTEM


	Load sensing/LUDV hydraulic system, electrohydraulic pilot-controlled work functions, load limit sensing control
Pump type	Swashplate-type variable-displacement piston pump, load pressure-independent flow distribution for simultaneous, independent control of work functions
Pump control	Zero-stroke control, on-demand flow control – the pumps only pump as much oil as will actually be used, pressure purging, load limit sensing control
Operating pressure	max. 330 bar
Filtration	High-performance filtration with long change interval
Hydraulic tank	500 l
Control system	Proportional, precision electrohydraulic actuation of work movements, 2 electric servo joysticks for work functions, including winch motion display via vibration transducer, additional functions via switches and pedals
Safety	Hydraulic circuits secured with safety valves Pipe fracture safety valve for luffing and telescoping cylinders
Options	<ul style="list-style-type: none"> ■ Bio-oil ■ SENNEBOGEN HydroClean 3 µm hydraulic microfilter ■ Electric heater for hydraulic tank for temperatures below -20 °C

SLEWING DRIVE


Gearbox	Compact planetary gear with slant-axis hydraulic motor, integrated brake valves
Slewing gear brake	Spring-loaded disk brake, pedal for individual braking
Slewing ring	Externally geared slewing ring, sealed
Slewing speed	0-2 rpm , variable


643E Technical data, equipment

 CAB 	
Cab type	multiCab, can be inclined by 15°
Cab equipment	Flexibly mounted comfortable cab with super sound insulation. All-weather design, all-round glazing in safety glass and large roof window, adjustable windshield. Flexibly mounted comfortable seat, adjustable according to weight and shock-absorbent. Dashboard overview with swiveling steering column. Variable, controllable cab heating with air circulation stage and particle filter, automatic climate control
Options	<ul style="list-style-type: none"> ■ Cab type E240, can be elevated 240 cm ■ Cab can be tilted 20° ■ Auxiliary heating system with timer ■ Activated carbon filter for cabs ■ Armored-glass windshield ■ Armored-glass sunroof ■ Protective roof grating ■ FOPS protective roof grating ■ Radio with USB and SD connection, MP3 and Bluetooth function

 ATTACHMENTS	
Design	Decades of experience, state-of-the-art computer simulation, maximum stability and service life, oversized and low-maintenance bearing points, sealed special bearing bushes, precision-crafted
Telescopic boom	4-part with pulley head, continuous hydraulic telescoping to 9–30 m
Hoisting winch	Drive using inclined axis hydraulic motor with compact planetary gear, traction 35 kN (40 kN in the 1st position), cable speed 0–95 m/min., cable diameter 14 mm, 160 m cable length.
Safety brake	Spring-loaded disk brake
Crane safety	Next-generation load moment monitoring, straightforward panel displaying all important data through SENCON display, lifting limit switch, cable exit protection, pressure relief valves and pipe fracture safety device with Eventrecorder
Cylinders	Hydraulic cylinders with high-quality sealing and guide elements
Options	<ul style="list-style-type: none"> ■ 6.5 m fly boom, tiltable (0°, 40°), extremely fast and easy setup without auxiliary devices, locked on basic boom when not in use

Options	<ul style="list-style-type: none"> ■ Fly boom extension to 13 m, tiltable (0°, 40°) ■ Wind movement display using vibrating joystick ■ Auxiliary jib, 3.5 t load capacity, 1-strand ■ 2nd crane winch: traction 35 kN (4th position), cable speed 0–95 m/min, cable diameter 14 mm, 130 m cable length ■ Additional load charts accepted for 2°/4° incline position ■ 7.5 kW electrohydraulic emergency unit ■ Remote radio control ■ Working range restriction
---------	---

 UNDERCARRIAGE	
Design	T41/380 crawler undercarriage with hydraulically extendable track width. Stable welded construction.
Drive	Hydraulic travel drive per chassis side, adjustable hydraulic drive motors
Parking brake	Spring-loaded, hydraulically ventilated disk brake
Traveling gear	700 mm, 3-grouser base plates, maintenance-free tractor drive
Speed	0–2.7 km/h
Options	Available base plate types: <ul style="list-style-type: none"> ■ 800 mm 3-grouser base plates ■ 900 mm 3-grouser base plates ■ 700 mm flat base plates


 OPERATING WEIGHT	
Mass	Approx. 42 t With 30 m telescopic boom, 13 m fly boom, 35 t hook, 700 mm 3-grouser base plates, 2 hoisting winches, hydraulically telescoping undercarriage, 7 t ballast, 4 t undercarriage ballast
Notice	The operating weight varies according to model type.



643E Crane equipment



30 m main boom (HA)

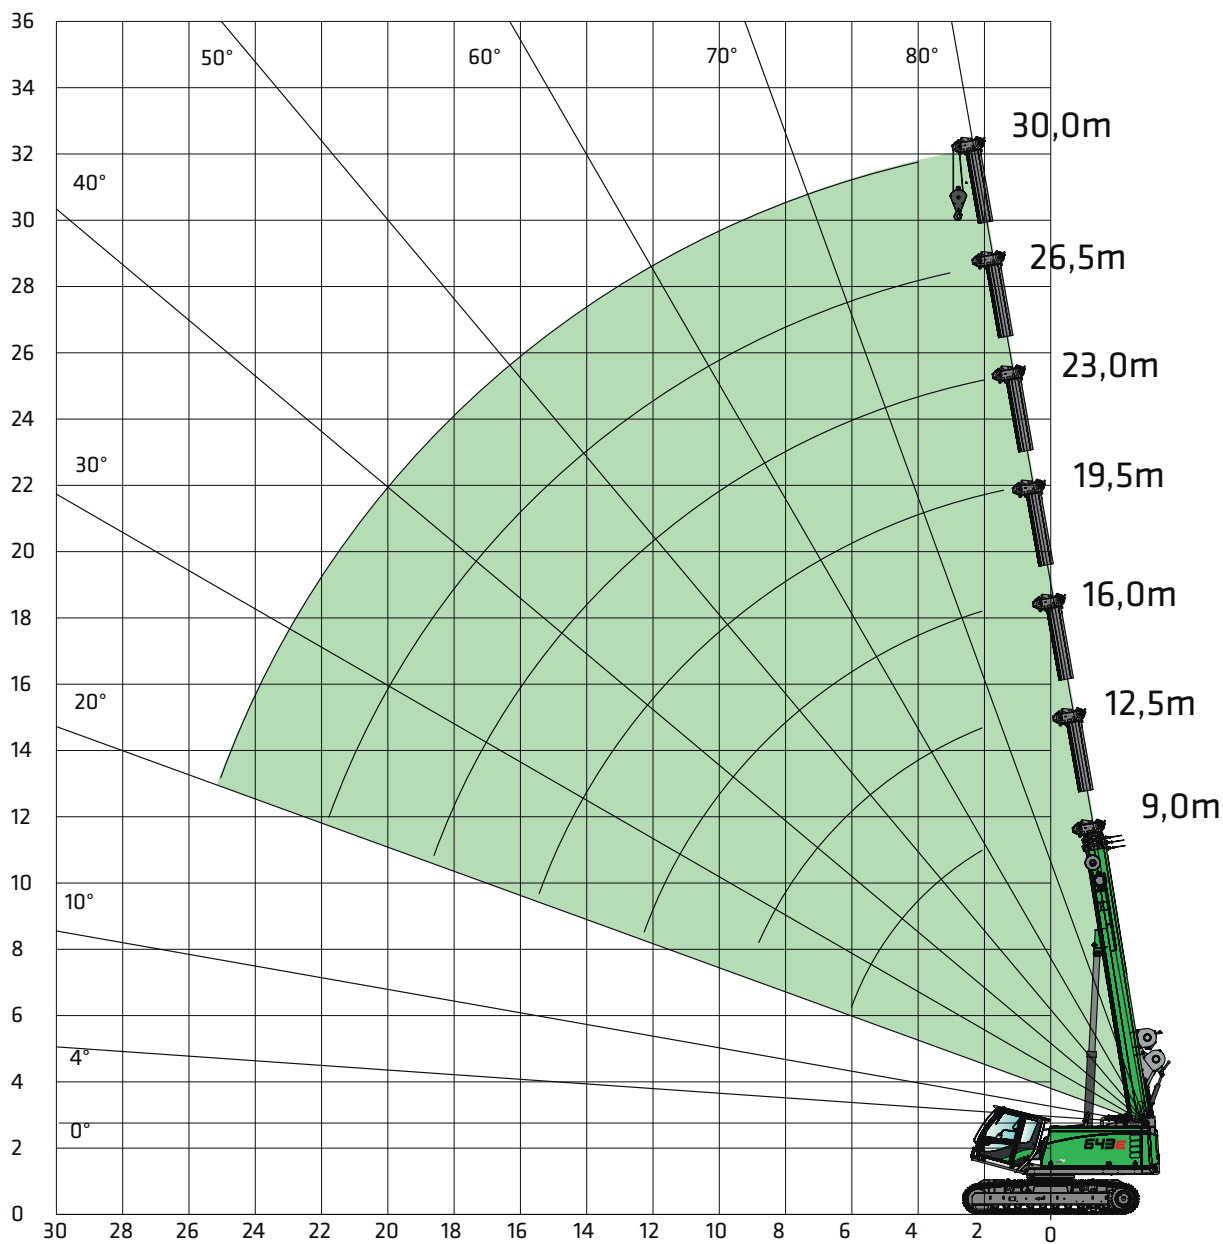

Hook

Capacity	Weight	Number of strands								
		9	8	7	6	5	4	3	2	1
32 t 4-pulley	300 kg	31,500 kg	28,000 kg	24,500 kg	21,000 kg	17,500 kg	14,000 kg	10,500 kg	7,000 kg	3,500 kg
25 t 3-pulley	220 kg			24,500 kg	21,000 kg	17,500 kg	14,000 kg	10,500 kg	7,000 kg	3,500 kg
4 t	40 kg									3,500 kg

643E Load ratings




30 m main boom (HA)

	Boom length [m]																				
	9.0			12.5			16.0			19.5			23.0			26.5			30.0		
Counterweight [t]																					
Undercarriage ballast [t]																					
Undercarriage track width [m]																					
Outreach [m]																					
2.0	40.0	40.0	40.0																		
3.0	35.0	35.0	33.0	20.0	20.0	20.0	15.0	15.0	15.0	14.0	14.0	14.0	11.0	11.0	11.0	8.9	8.9	8.9	5.0	5.0	5.0
4.0	30.2	27.7	20.2	20.0	20.0	19.9	15.0	15.0	15.0	14.0	14.0	14.0	11.0	11.0	11.0	8.9	8.9	8.9	5.0	5.0	5.0
5.0	25.5	18.9	14.2	20.0	18.7	14.0	15.0	15.0	13.9	13.3	13.3	13.3	11.0	11.0	11.0	8.6	8.6	8.6	5.0	5.0	5.0
6.0	18.0	14.1	10.7	18.5	13.9	10.5	14.9	13.8	10.5	12.0	12.0	10.9	10.3	10.3	10.3	8.3	8.3	8.3	5.0	5.0	5.0
7.0	11.8/6.2	13.4/6.2	10.2/6.2	14.3	10.9	8.3	13.2	10.8	8.2	10.9	10.9	8.6	9.5	9.5	8.9	7.8	7.8	7.8	5.0	5.0	5.0
8.0				11.5	8.8	6.7	11.4	8.7	6.6	9.8	9.1	7.0	8.7	8.7	7.3	7.4	7.4	7.4	5.0	5.0	5.0
9.0				9.5	7.3	5.5	9.4	7.2	5.4	9.0	7.6	5.8	7.9	7.8	6.1	6.9	6.9	6.2	5.0	5.0	5.0
10.0				7.5/9.6	6.5/9.6	4.9/9.6	8.0	6.1	4.5	8.3	6.4	4.9	7.1	6.7	5.1	6.4	6.4	5.3	5.0	5.0	5.0
11.0							6.8	5.1	3.7	7.2	5.5	4.1	6.5	5.7	4.4	5.9	5.9	4.5	5.0	5.0	4.7
12.0							5.9	4.4	3.1	6.2	4.7	3.5	5.9	5.0	3.7	5.5	5.2	3.9	5.0	5.0	4.1
13.0							5.0	3.7	2.6	5.4	4.1	3.0	5.5	4.3	3.2	5.1	4.5	3.4	4.7	4.7	3.5
14.0										4.8	3.6	2.6	5.0	3.8	2.8	4.8	4.0	3.0	4.4	4.1	3.1
15.0										4.2	3.1	2.2	4.5	3.3	2.4	4.5	3.5	2.6	4.1	3.7	2.7
16.0										3.7	2.7	1.9	4.0	2.9	2.1	4.2	3.1	2.3	3.8	3.3	2.4
17.0										3.5/16.6	2.5/16.6	1.7/16.6	3.6	2.6	1.8	3.7	2.8	2.0	3.6	2.9	2.1
18.0													3.2	2.3	1.6	3.4	2.5	1.7	3.3	2.6	1.9
19.0													2.9	2.0	1.3	3.0	2.2	1.5	3.1	2.3	1.6
20.0													2.6	1.8	1.1	2.7	2.0	1.3	2.9	2.1	1.4
21.0													2.5/20.1	1.8/20.1	1.1/20.1	2.5	1.8	1.1	2.6	1.9	1.3
22.0																2.2	1.6	1.0	2.4	1.7	1.1
23.0																1.9/23.6	1.3/23.6	0.7/23.6	2.2	1.5	0.9
24.0																			2.0	1.3	0.8
25.0																			1.8	1.2	0.7
26.0																			1.6	1.1	0.6
27.0	Table no.: 643R-30.0/75/1977/7.0/08.06																		1.5	1.0	0.5
28.0	Table no.: 643R-30.0/75/1677/7.0/02.08																		1.5/27.1	0.9/27.1	0.5/27.1
Number of strands	10	10	10	6	6	6	5	5	5	4	4	4	4	4	4	3	3	3	2	2	2
I	0%			50%			100%			100%			100%			100%					
II	0%			0%			0%			25%			50%			75%					
III	0%			0%			0%			25%			50%			75%					
at collapsible jib																					
Load capacity reduction [kg]	570			420			330			280			240			210			180		

643E Crane equipment



6.5 m or 13 m fly boom (SA)

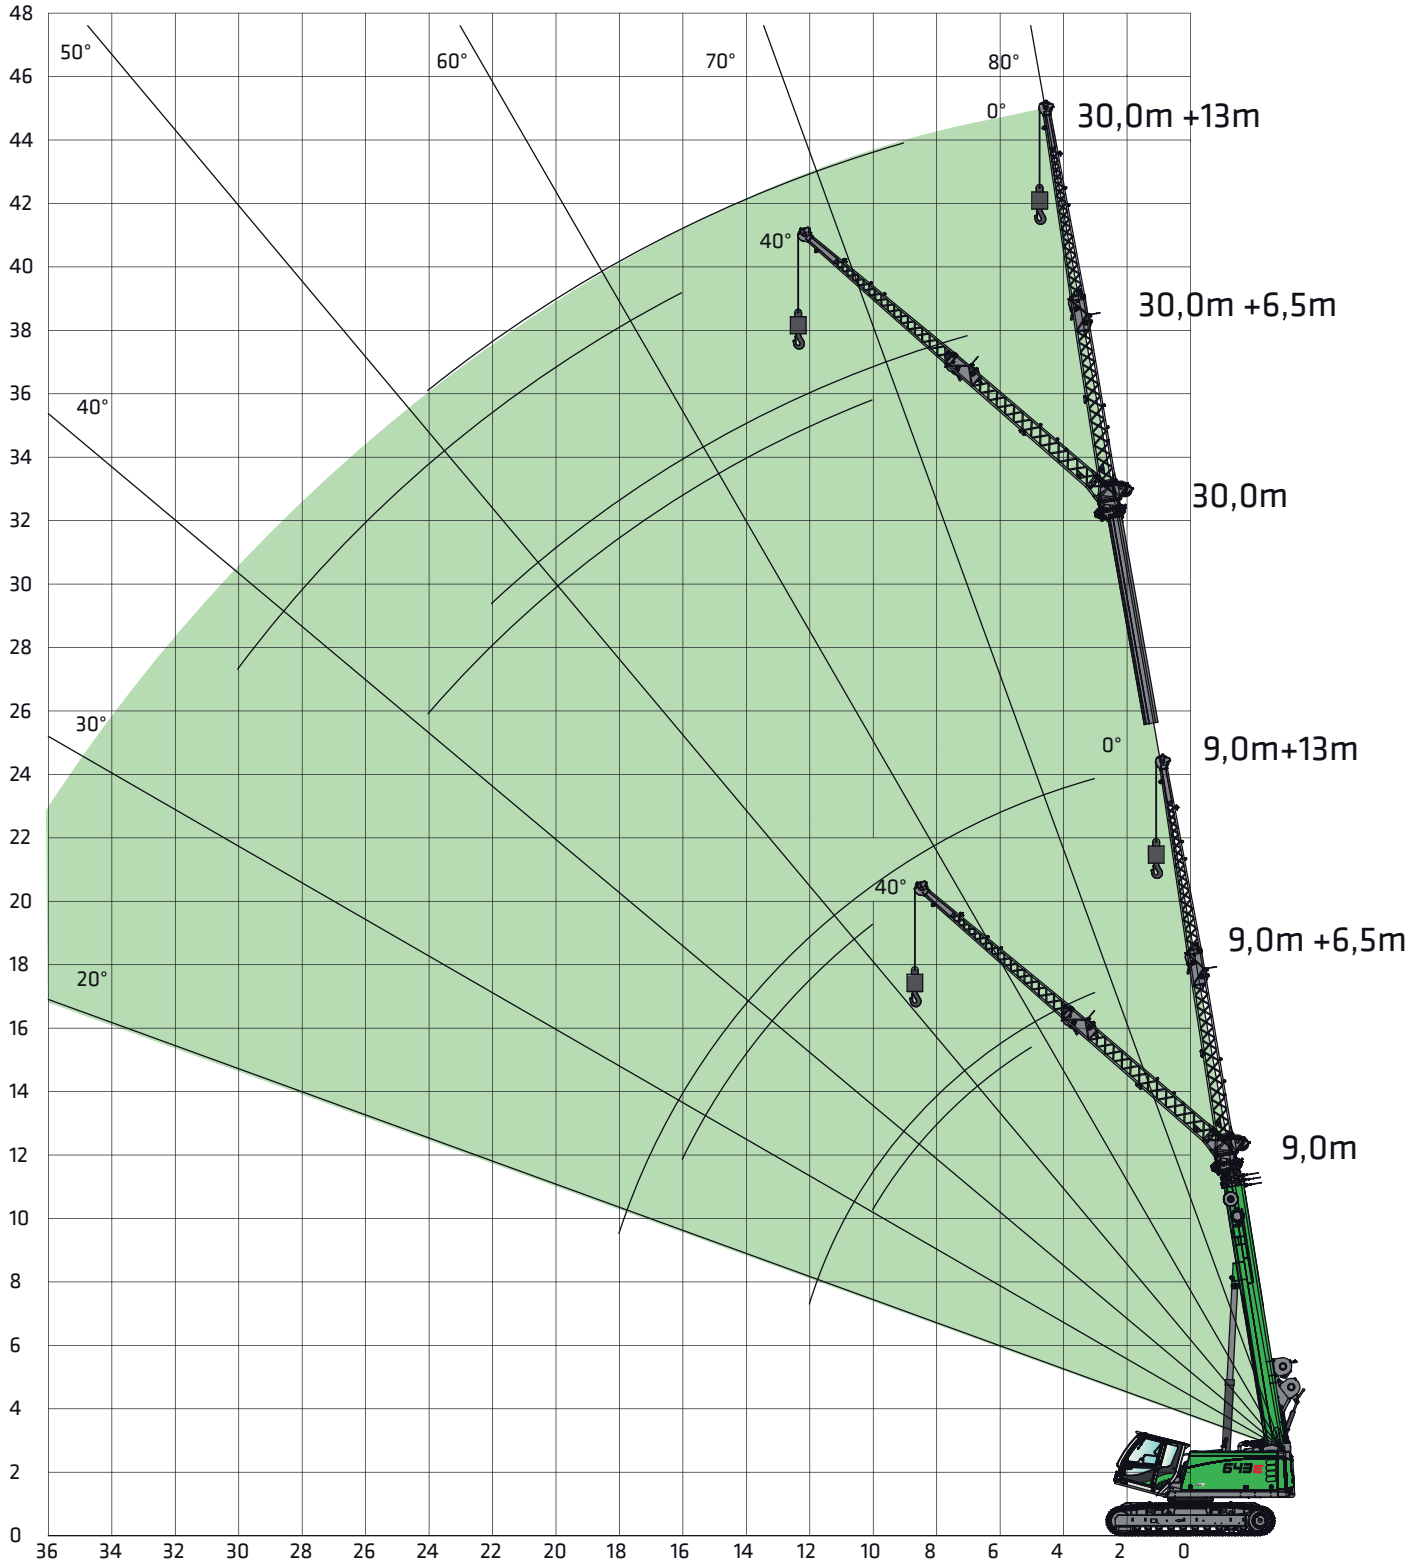

643E Load ratings



6.5 m fly boom (SA)

7.0 t	4.0 t	Telescopic boom length [m]										
		9.0		16.0		23.0		30.0				
3.8 m	0°		40°		0°		40°		0°		40°	
	Outreach [m]											
2.0												
3.0	6.0			6.0								
4.0	6.0			6.0								
5.0	5.5	3.5		6.0		6.0						
6.0	4.9	3.3		6.0	3.6	6.0						
7.0	4.4	3.1		5.9	3.4	6.0			3.5			
8.0	4.0	2.9		5.4	3.3	5.9	3.4		3.5			
9.0	3.7	2.8		5.0	3.2	5.6	3.3		3.5			
10.0	3.4	2.7		4.6	3.1	5.3	3.2		3.5	3.2		
11.0	3.1			4.3	3.0	5.0	3.2		3.5	3.0		
12.0	2.8			4.1	2.8	4.7	3.1		3.5	2.9		
13.0				3.9	2.8	4.4	3.0		3.5	2.8		
14.0				3.7	2.8	4.2	2.9		3.3	2.7		
15.0				3.5		3.9	2.9		3.0	2.5		
16.0				3.3		3.7	2.8		2.8	2.4		
18.0				2.9		3.3	2.7		2.4	2.3		
20.0						2.7	2.6		2.1	2.1		
22.0						2.2			1.9	1.9		
24.0						1.7			1.8	1.7		
26.0						1.4			1.5	1.6		
28.0									1.2			
30.0									0.9			
32.0									0.7			
34.0												
36.0												
38.0	Table no.: 643R-30.0/75/1977/7.0/08.06 SA6.5											
Number of strands	1	1	1	1	1	1	1	1	1	1	1	1
I	0%		100%		100%		100%		100%		100%	
II	0%		0%		50%		100%		100%		100%	
III	0%		0%		50%		100%		100%		100%	

643E Load ratings



13 m fly boom (SA)

	7.0 t	4.0 t	Telescopic boom length [m]							
			9.0		16.0		23.0		30.0	
			0°	40°	0°	40°	0°	40°	0°	40°
Outreach [m]										
2.0										
3.0		3.0								
4.0		3.0								
5.0		3.0		3.0						
6.0		3.0		3.0						
7.0		2.9		3.0		3.0				
8.0		2.6		3.0		3.0				
9.0		2.3		2.9		3.0		2.0		
10.0		2.1	1.6	2.7		2.9		2.0		
11.0		2.0	1.5	2.5		2.7		2.0		
12.0		1.8	1.4	2.4	1.5	2.6		2.0		
13.0		1.7	1.4	2.2	1.5	2.5		2.0		
14.0		1.6	1.3	2.1	1.5	2.4	1.5	2.0		
15.0		1.6	1.3	2.0	1.4	2.3	1.5	2.0		
16.0		1.5	1.3	1.9	1.4	2.2	1.4	2.0	1.5	
18.0		1.1		1.7	1.3	2.0	1.4	2.0	1.4	
20.0				1.6	1.3	1.8	1.3	1.9	1.4	
22.0				1.4		1.7	1.3	1.7	1.3	
24.0				1.3		1.6	1.3	1.6	1.3	
26.0						1.4	1.3	1.4	1.2	
28.0						1.3		1.3	1.2	
30.0						1.3		1.2	1.1	
32.0						1.1		1.1	1.1	
34.0								0.9		
36.0								0.7		
38.0	Table no.: 643R-30.0/75/1977/7.0/08.06 SA13.0								0.6	
Number of strands	1	1	1	1	1	1	1	1	1	1
I	0%		100%		100%		100%			
II	0%		0%		50%		100%			
III	0%		0%		50%		100%			

643E Load ratings



Auxiliary jib (HA-S)

	Boom length [m]													
	9.0		12.5		16.0		19.5		23.0		26.5		30.0	
Counterweight [t]	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
Undercarriage ballast [t]	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Undercarriage track width [m]	3.8	2.3	3.8	2.3	3.8	2.3	3.8	2.3	3.8	2.3	3.8	2.3	3.8	2.3
Outreach [m]														
2.0														
3.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5 / 3.5
4.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
5.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
6.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
7.0	3.5 / 6.7	3.5 / 6.7	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
8.0			3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
9.0			3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
10.0			3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
11.0			3.5 / 10.2	3.5 / 10.2	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
12.0					3.5	3.0	3.5	3.4	3.5	3.5	3.5	3.5	3.5	3.5
13.0					3.5	2.5	3.5	2.9	3.5	3.1	3.5	3.3	3.5	3.4
14.0					3.5 / 13.7	2.1 / 13.7	3.5	2.5	3.5	2.7	3.5	2.9	3.5	3.0
15.0							3.5	2.1	3.5	2.3	3.5	2.5	3.5	2.6
16.0							3.5	1.8	3.5	2.0	3.5	2.2	3.5	2.3
17.0							3.1	1.5	3.5	1.7	3.5	1.9	3.5	2.0
18.0							3.0 / 17.2	1.4 / 17.2	3.1	1.5	3.3	1.6	3.2	1.8
19.0									2.8	1.2	2.9	1.4	3.0	1.5
20.0									2.5	1.0	2.6	1.2	2.8	1.3
21.0									2.2 / 20.7	0.8 / 20.7	2.4	1.0	2.5	1.2
22.0											2.1	0.9	2.3	1.0
23.0											1.8	0.7	2.1	0.8
24.0											1.7 / 24.2	0.6 / 24.2	1.9	0.7
25.0													1.7	0.6
26.0													1.5	0.5
27.0	Table no.: 643R-30.0/75/1977/7.0/12.16 HA-S												1.4	
28.0	Table no.: 643R-30.0/75/1227/7.0/12.16 HA-S												1.4 / 27.1	
Number of strands	1	1	1	1	1	1	1	1	1	1	1	1	1	1
I	0%		50%		100%		100%		100%		100%		100%	
II	0%		0%		0%		25%		50%		75%		100%	
III	0%		0%		0%		25%		50%		75%		0%	
at collapsible jib														
Load capacity reduction [kg]	570		420		330		280		240		210		180	


643E Load capacity programs

		Main boom HA			Auxiliary jib HA-S		6.5 m fly boom (SA)			Fly boom SA 13 m		
Counterweight [t]	Undercarriage ballast [t]											
		Undercarriage track width										
		360° 	360° 	360° 	360° 	360° 	360° 	-	-	360° 	-	-

Note:


1. Specified load ratings only apply when machine is level ($\pm 0.3^\circ$) and stable.
2. Load ratings are specified in tons and apply to 360 degrees.
3. Load ratings are in accordance with DIN 15019.2 and ISO 4305.
4. The weight of the load handling devices (e.g., hook, suspension gear) must be subtracted from the load ratings.
5. Load ratings must be limited or reduced when conditions are unfavorable, such as soft or uneven ground, slopes, wind, lateral loads, swinging loads, jerking or sudden stopping of load, operator inexperience, driving with load.
6. Permissible rope winch per strand in crane mode for cable diameter 14 mm – 3,500 kg.
7. Specified load ratings are for reference only. The currently valid load ratings can be found in the tables in the operating manual.
8. Optional load capacities are also available for a $2^\circ/4^\circ$ incline position.

643E Fly boom

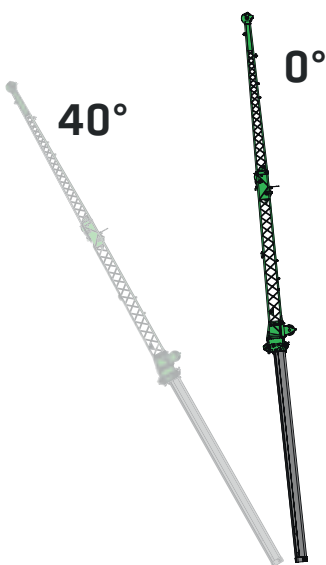


Fly boom variants

- **6.5 m fly boom***
Max. 2-strand, possible offset angle $0^\circ/40^\circ$
- **13 m fly boom***
with 6.5 m extension,
1-strand, offset angle $0^\circ/40^\circ$
- **Auxiliary jib**
3.5 t load capacity, 1-strand

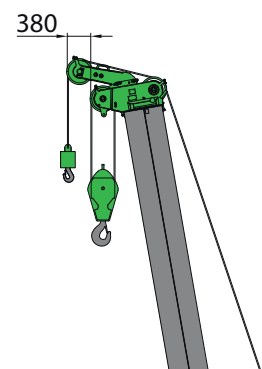

643E Transport dimensions and weights

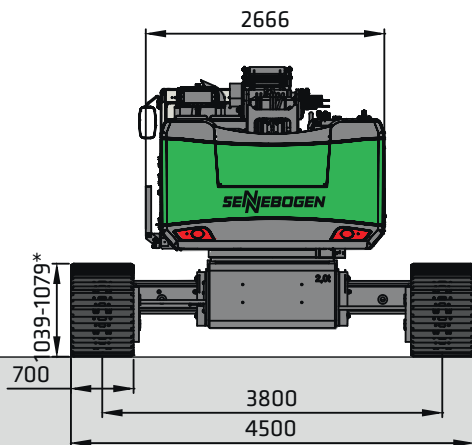


Base plates	Min. transport width
700 mm	3000 mm
800 mm	3300 mm
900 mm	3400 mm

643 with T41/380 undercarriage and 700 mm 3-grouser base plates


Operating weight: approx. 42 t

(with 13 m fly boom, 2 hoisting winches, 7.0 t counterweight, 4.0 t undercarriage ballast and 35 t hook)

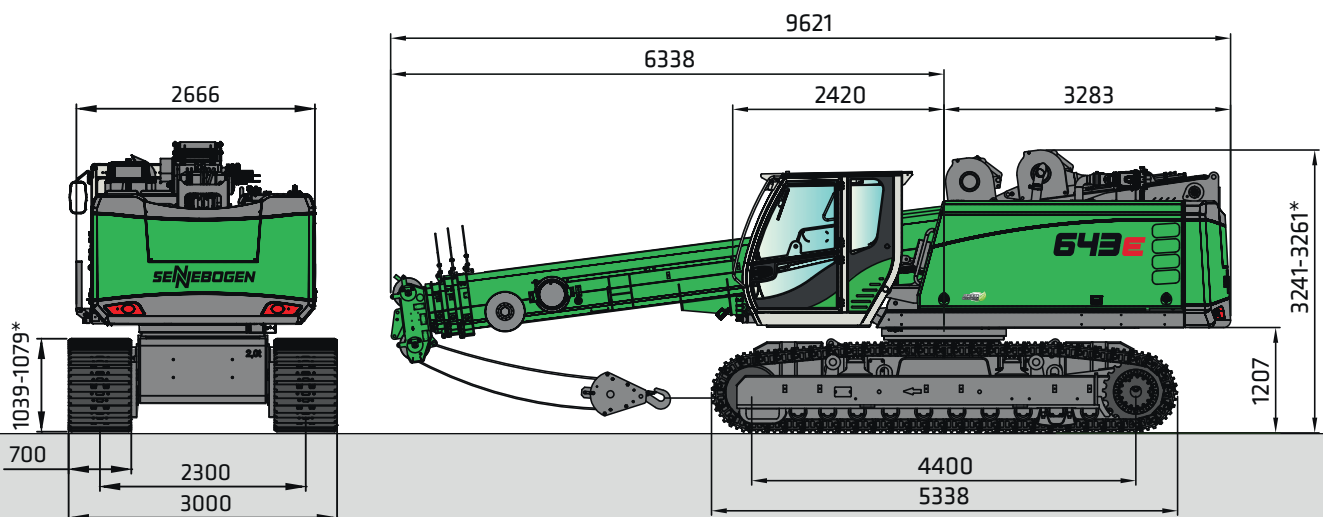



Transport weight: approx. 38,000 kg (13 m fly boom, 2 hoisting winches, without undercarriage ballast)
 approx. 42,000 kg (13 m fly boom, 2 hoisting winches, with undercarriage ballast)

643E Transport dimensions and weights

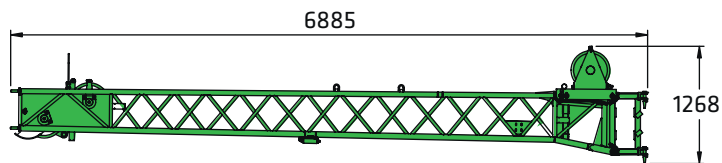



6.5 m fly boom

600 kg

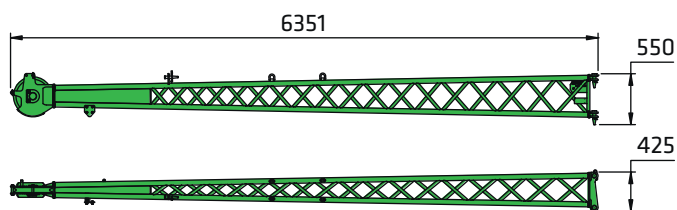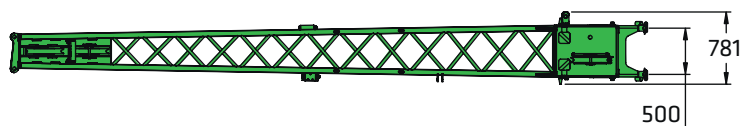


6.5 m fly boom extension

250 kg

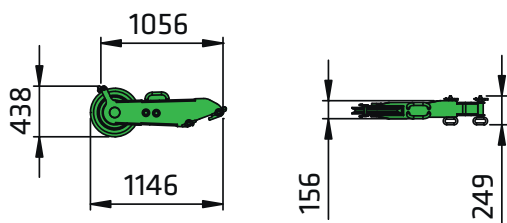


Auxiliary jib

50 kg

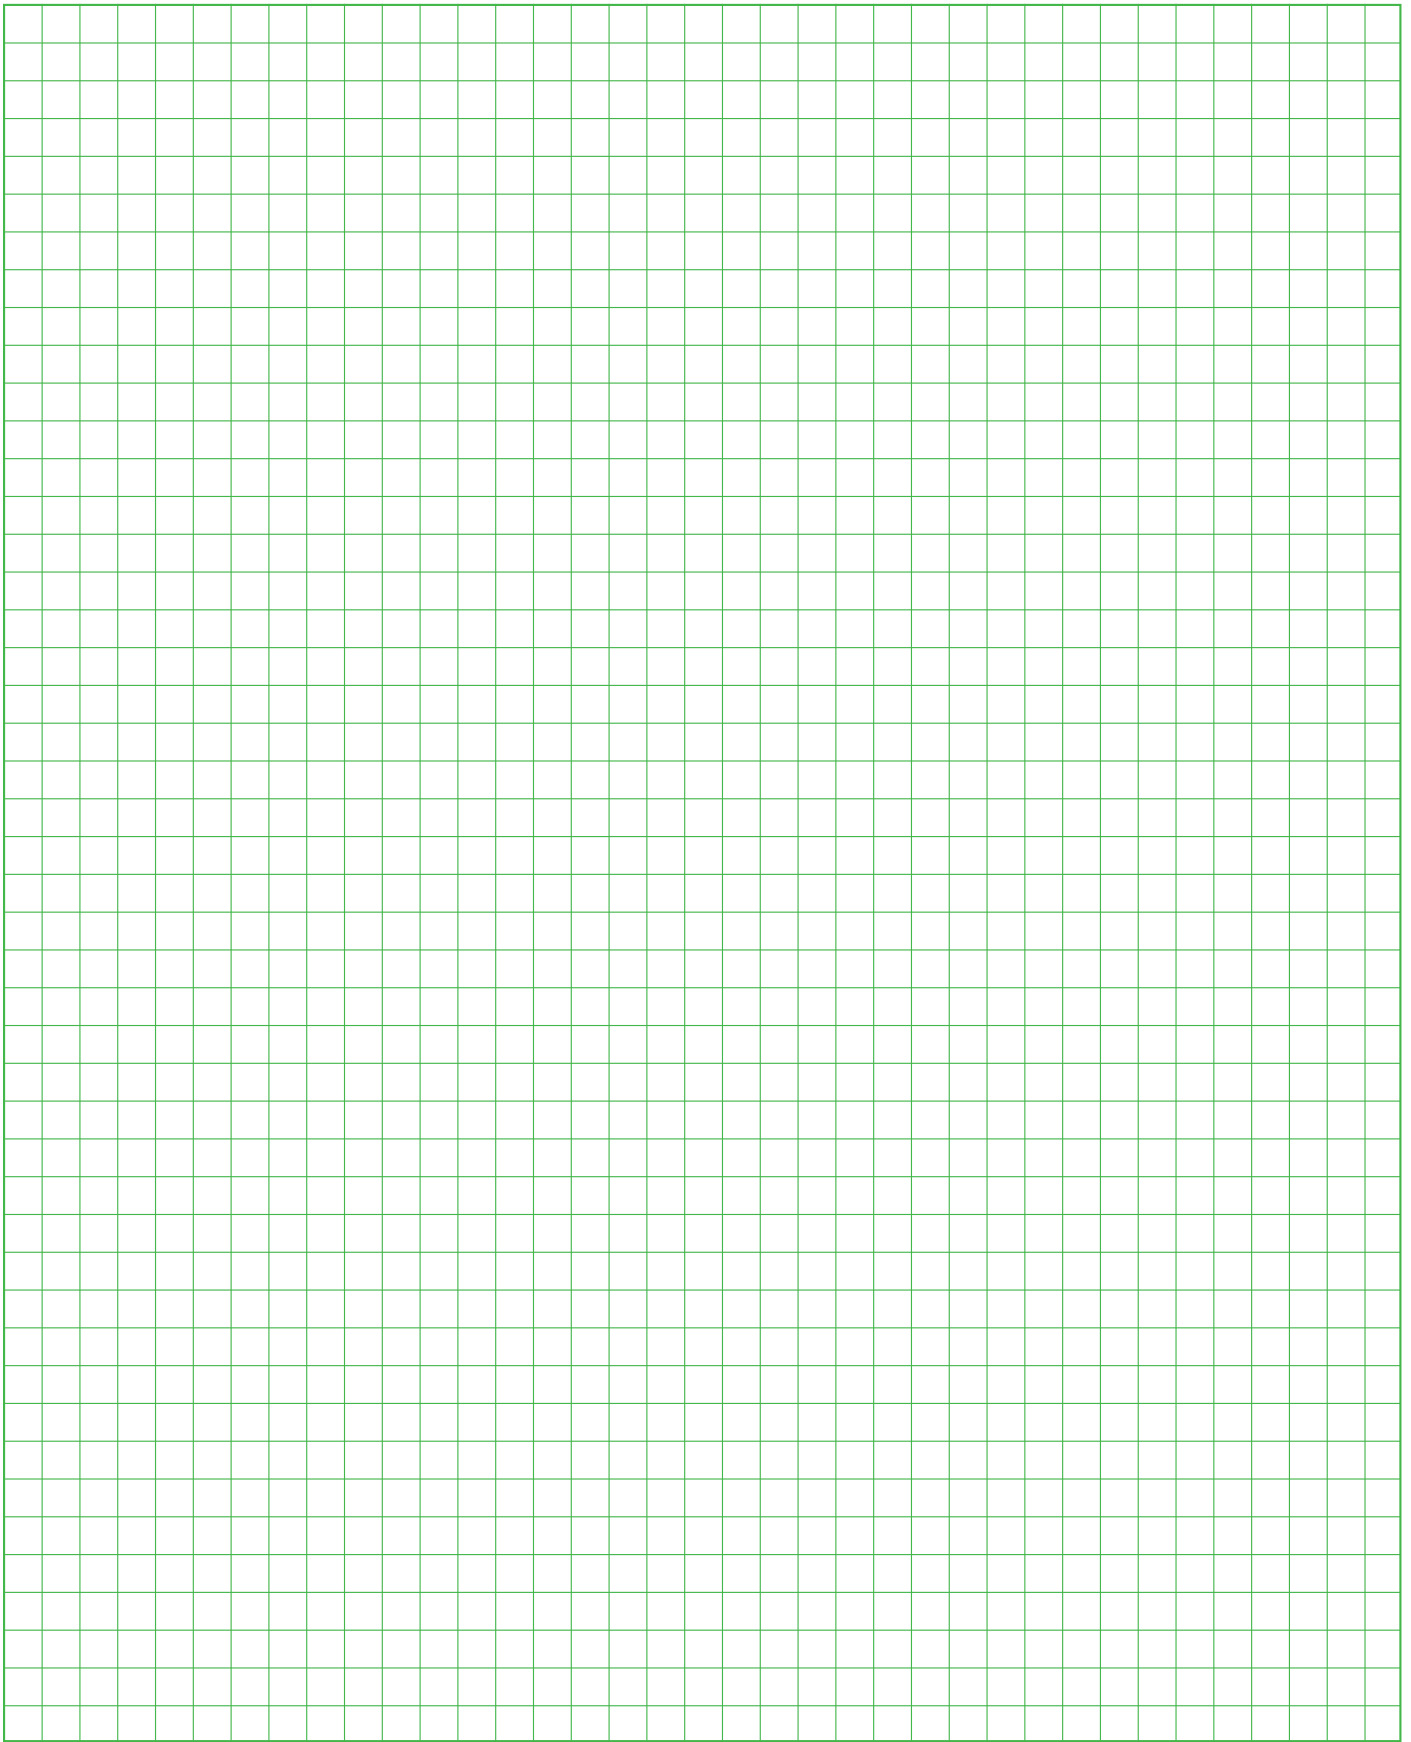

643E

R

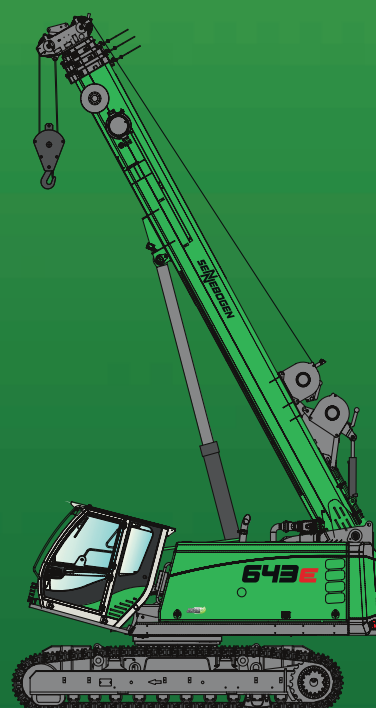

This catalog describes machine models, scopes of equipment of individual models, and configuration options (standard equipment and optional equipment) of the machines delivered by SENNEBOGEN Maschinenfabrik. Machine illustrations can contain optional equipment and supplemental equipment. Actual equipment may vary in a tolerance range depending on the country to which the machines are delivered, especially in regard to standard and optional equipment

All product designations used may be trademarks of SENNEBOGEN Maschinenfabrik GmbH or other supplying companies, and any use by third parties for their own purposes may violate the rights of the owners.

Please contact your local SENNEBOGEN sales partner for information concerning the equipment variants offered. Requested performance characteristics are only binding if they are expressly stipulated upon conclusion of the contract. Delivery options and technical features are subject to change. Errors and omissions excepted. Equipment is subject to change, and rights of advancement are reserved.

© SENNEBOGEN Maschinenfabrik GmbH, Straubing/Germany. Reproduction in whole or in part only with written consent of SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany.

The Sennebogen logo, consisting of the word 'SENNEBOGEN' in a bold, stylized, sans-serif font. The letters are white with a blue outline and are set against a dark blue rectangular background.

SENNEBOGEN
Maschinenfabrik GmbH
Sennebogenstraße 10
94315 Straubing, Germany

Tel. +49 9421 540-144/146
marketing@sennebogen.de

Order no. 299155
643R-E-081710-011910

GO FOR GREEN

www.sennebogen.com