

Technical sheet


MHT 14350

Telehandlers





Capacities
Max. capacity
Max. lift height
Max. reach
Weight and dimensions
l2 - Overall length of fork carriage
b1 - Overall width
h17 - Overall height
y - Wheelbase
m4 - Ground clearance
Wa1 - Frame outer turning radius
Unladen weight (with forks)
Standard tyres
Standard forks
Engine
Brand
Environmental standards
Model
Number of cylinders - Capacity
Power
Max. torque
Laden drawbar pull
Transmission
Type
Number of gears (forward/reverse)
Max. speed of travel (may vary according to the applicable regulation)
Parking brake
Service brake
Hydraulics
Type of pump
Hydraulic flow rate - Pressure
Tank capacities
Engine oil
Hydraulic oil
Fuel
AdBlue® Diesel Exhaust Fluid (DEF)
Noise & vibration
Noise at driving position (LpA)
Noise to environment (LwA)
Vibration on hands/arms
Miscellaneous
Steering wheels / Driving wheels
Safety
Controls

Metric
35000 kg
13.60 m
8.50 m
10.93 m
3.53 m
3.82 m
5.70 m
0.69 m
7.32 m
69000 kg
Pneumatic
2400x300x135
Mercedes
Stage IV / Tier 4 Final
OM 936 LA
6 - 7200 cm³
350 hp / 260 kW
1400 Nm at 1600 rpm
33000 daN
Hydrostatic
3/3
25 km/h
Automatic negative parking brake
Hydraulic
Load sensing pump
400 l/min - 350 bar
760 l
760 l
720 l
63 l
80 dB(A)
107 dB(A)
2.5 m/s²
4 / 4
Standard EN 15000 Cab ROPS - FOPS Level 2
JSM

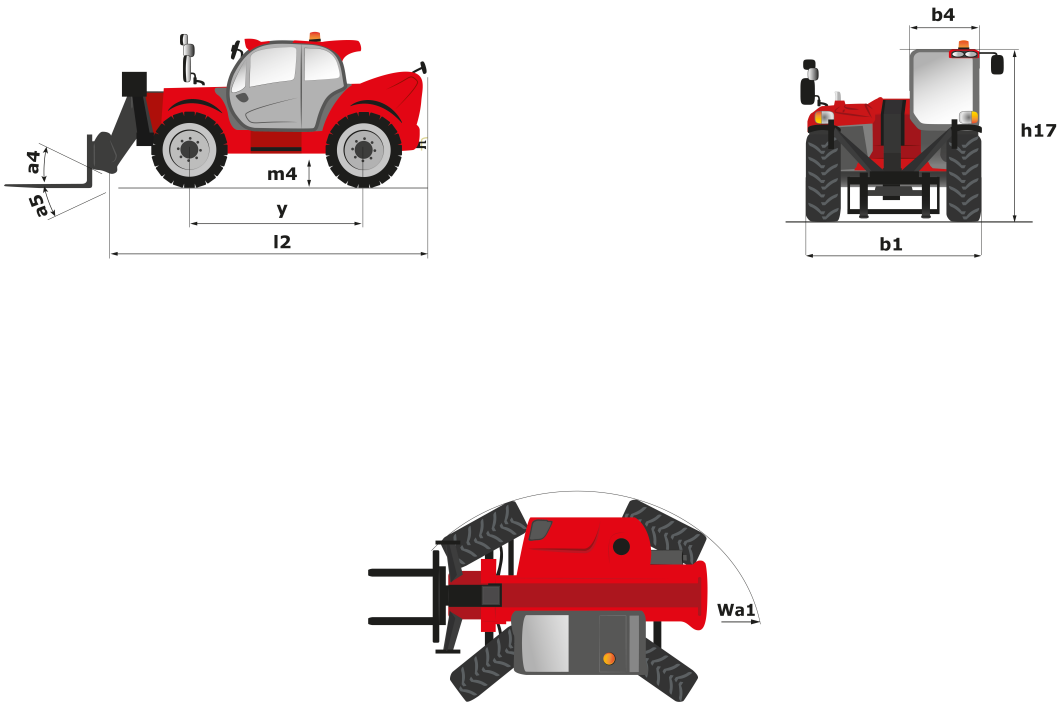

Load chart

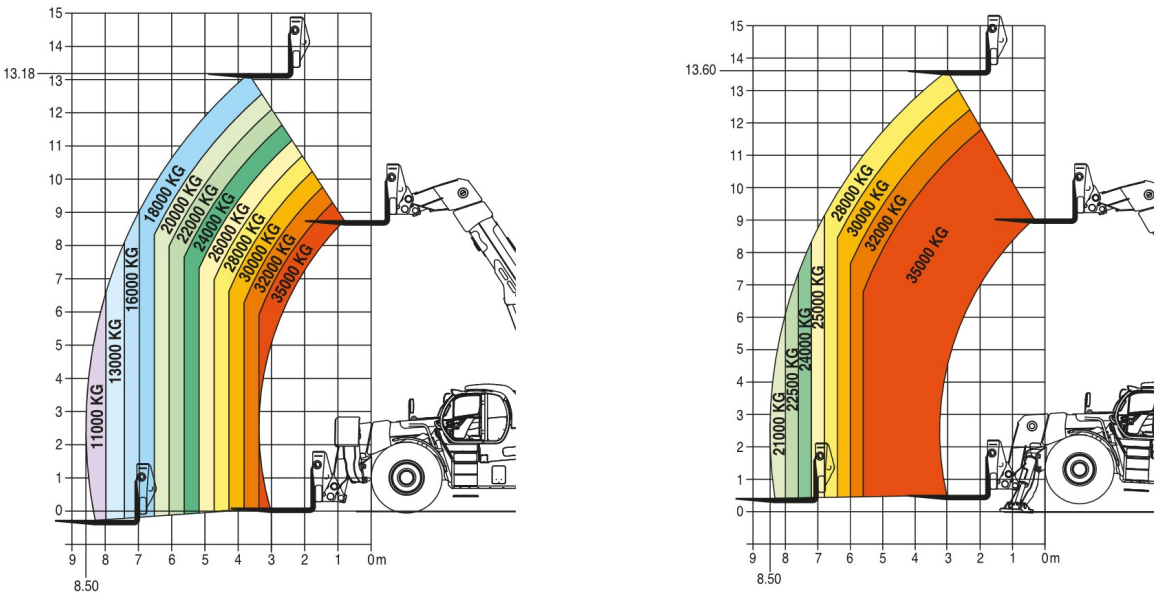

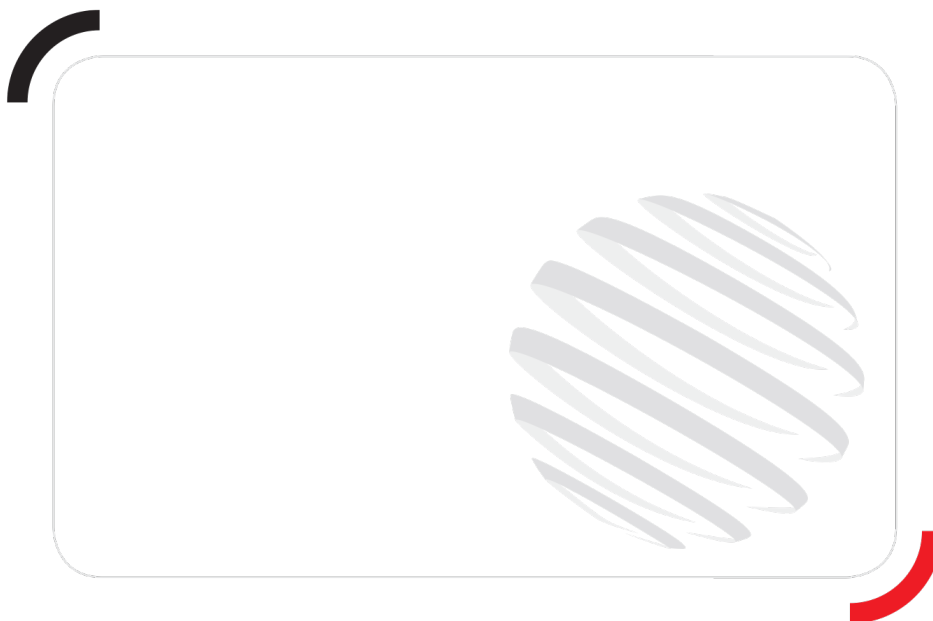

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes