

# Low Loaders



- 6T payload
- 50mm softwood sheeted floor
- Spring assisted ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2`4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- LED lights to rear
- Fixed drawbar
- Hose Stowage
- Fixed towing Eye



- Up to 16T payload
- 50mm softwood sheet floor
- Spring assist ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2`4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- LED lights to rear including number plate light
- Sprung drawbar standard
- Hose Stowage
- Fixed towing Eye
- 215/75/17.5 Twin Wheels





- GVW up to 33T
- 50mm softwood sheet floor
- Spring assist ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2`4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- LED lights to rear including number plate
- Sprung drawbar
- Hose Stowage
- Fixed towing Eye



- 27T gross weight (3 axle)
- 35T gross weight (4 axle)
- Optional 32T gross version (3 axle)
- Heavy duty wheel arches c/w grip bars
- Hydraulic brakes
- Full LED road lights
- Fixed towing eye
- Front & rear loading ramps
- Chime bar tie points
- Plated H-Beam fabricated chassis



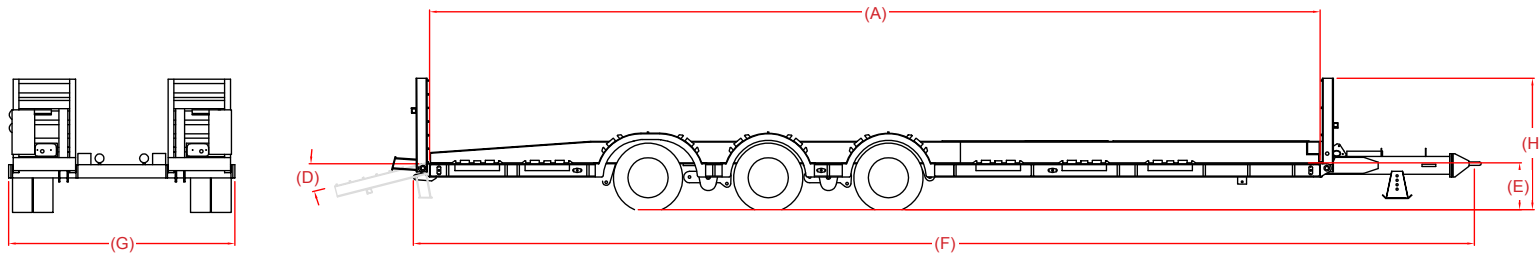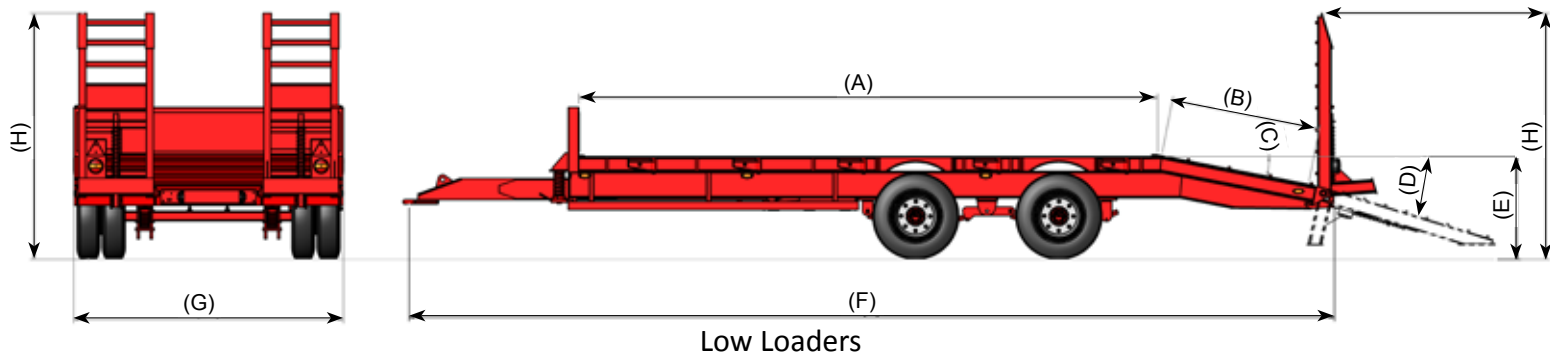

Forestry trailer

	MODEL	Bed size (includes headboard) (A)	Beavertail (B)	Beavertail Angle (C)	Ramps (spring assisted)	Ramp Angle (D)	Floor height (E)	Max Length (F)	Width (G)	Height With Ramps (H)	Chassis	Axle	Brakes (Hydraulic)	Drawbar	Slack Adjusters	Tyres
Single Axle	6 T	3.99m x 2.14m (13' x 7')	1.26m (4')	16°	1.52m x 0.71 (5' x 2'4")	17°	0.91m (36")	7.28m	2.14m	2.01m	200x75x23 RSC	70mm 6-stud	300x60	Fixed	No	2 off 400/60-15.5
Tandem Axle	9 T	4.61m x 2.286m (15' x 7'6")	1.51m (5')	14°	1.7m x 0.71 (5'7" x 2'4")	15°	0.94m (37")	8.16m	2.286m	2.2m	200x75x23 RSC plated	70mm 6-stud	300x60	Sprung	No	4 off 400/60-15.5
	9 T	4.61m x 2.286m (15' x 7'6")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	16°	0.86m (34")	8.16m	2.286m	2.2m	200x75x23 RSC plated	70mm 6-stud	300x60	Sprung	No	4 off 235/75-R17.5
	16 T	5.49m x 2.54m (18' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.9m (35")	9.1m	2.54m	2.24m	254x146x31 H-Beam	90mm 8-stud Tandem axle	300x90	Sprung	Yes	8 off 215/75-R17.5
Tridem Axle	22 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.9m (35")	9.1m	2.54m	2.24m	254x146x31 H-Beam	90mm 8 stud	300x90	Sprung	Yes	12 off 215/75-R17.5
	25 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.91m (36")	9.1m	2.54m	2.25m	254x146x31 H-Beam	100mm 8 stud	300x90	Sprung	Yes	12 off 215/75-R17.5
	28 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.9m (35")	9.1m	2.54m	2.25m	Fabricated chassis	100mm 8 stud	300x135	Sprung	Yes	12 off 215/75-R17.5
	30 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.91m (36")	9.1m	2.54m	2.265m	Fabricated chassis	100mm 8 Stud	300x135	Sprung	Yes	12 off 215/75-R17.5
	Forestry 27 T	10m x 2.54m (32'10 x 8'4")	N/A	N/A	1.05m x 0.71m (3'5" x 2'4")	20°	0.52m (20")	12.16m	2.54m	1.48m	254x146x31 H-Beam plated	100mm 8 Stud c/w Rear Steer	300x90	Sprung	Yes	12 off 215/75-R17.5
4-Axle (not for use on public roads in the EU)	Forestry 35 T (Gross)	11m x 2.54m (36' x 8'4")	N/A	N/A	1.05m x 0.71m (3'5" x 2'4")	20°	0.52m (20")	13.16m	2.54m	1.48m	254x146x31 H-Beam plated	100mm 8 Stud c/w 3rd & 4th Axles Steering	300x135	Sprung	Yes	16 off 215/75-R17.5

Please note: Imperial dimensions are rounded to the nearest foot or inch

## Options



**Bolt-On Bale Wedge  
(Cheese Wedge)**



**Wedge Ramp**



**6ft Steel Tool Box**



**Track Guides**



**Double T Bar Headboard**



**Floor Hook**



**Headboard Outrigger  
Storage Tray**



**Durbar Sheeted ramps**



**Mantis Ramps**



**Pull out marker board**



**Hydraulic Jack**



**Forestry outriggers**



**Rear Tow hitch**



**Swing Outriggers**



**Rear steering axle**

## Common Options

---

### **BRAKES**

Dual Air/Hydraulic Brakes  
Air only brakes  
Load sensing air or Hydraulic  
Cable Operated breakaway system  
NC Electric Operated breakaway system  
ABS complete with Susie  
Automatic Slack Adjusters

### **SUSPENSION**

Air suspension c/w raise/lower valve  
Fabricated chassis

### **WHEELS**

Various wheel alternatives available

### **AXLES**

8 stud high speed  
10 stud high speed

### **FLOOR**

Longer Bed  
Hardwood floor  
Floor Hooks  
Flatbed with no Beavertail or ramps (same overall length)  
1.35m Wide bucket well in tail

### **OUTRIGGERS**

Swing out outriggers on bed or beavertail  
Outrigger Storage Tray c/w Boards  
Pull out markerboards c/w dual LED lights (4 off)

### **RAMPS**


Hydraulically Operated Ramps (all widths)  
Wider Ramps  
Wood Sheeted Ramps  
Wedge Ramps  
Mantis Flip-toe Ramps  
2.2m Long Ramp

### **OTHER**

Bolt-On Bale Cheese wedge (Steel)  
Adjustable Height towing eye  
Rear Tow Hitch  
Front Bale Rack  
Double T-bar Headboard  
Track Guides  
Post holes  
4 off Twist Locks

Revision.03 – March 2019

In accordance with our policy of continued development we reserve the right to alter specification and design without notice.



NC Engineering (Hamiltonsbawn) Ltd  
2 Killyrudden Road  
Hamiltonsbawn  
Co. Armagh  
Northern Ireland  
BT61 9SF

Tel: +44 (0) 28 38 871970  
Fax: +44 (0) 28 38 870362  
Email: [sales@nc-engineering.com](mailto:sales@nc-engineering.com)  
[www.nc-engineering.com](http://www.nc-engineering.com)

